


NOTES:

1. ALL SCHEDULE 40 PIPE AND JOINTS SHALL BE SOLVENT WELDED BEFORE BACKFILLING.
2. WHEN BOX IS PLACED IN CONCRETE PAVING, THE BOX SHALL BE OFFSET 12 INCHES MINIMUM THE NEAREST CONCRETE EDGE, WALL, CURB OR COLUMN.
3. WHEN BOX IS PLACED IN LANDSCAPE, THE BOX SHALL BE OFFSET 12 INCHES MINIMUM FROM THE NEAREST CONCRETE EDGE, WALL, CURB OR COLUMN.
4. IN LANDSCAPE AREAS, 10" DIAMETER PLASTIC VALVE BOX WITH PLASTIC LID, SECURE LID WITH 3/8" DIAMETER STAINLESS STEEL MACHINE BOLT AS COORDINATED VALVE BOX WITH H20 TRAFFIC RATED.
5. IN CONCRETE PAVING: 10" DIAMETER CONCRETE VALVE BOX WITH H20 TRAFFIC RATED CONCRETE LID, SECURED AND STAMPED AS DESCRIBED IN NOTE #4 ABOVE.

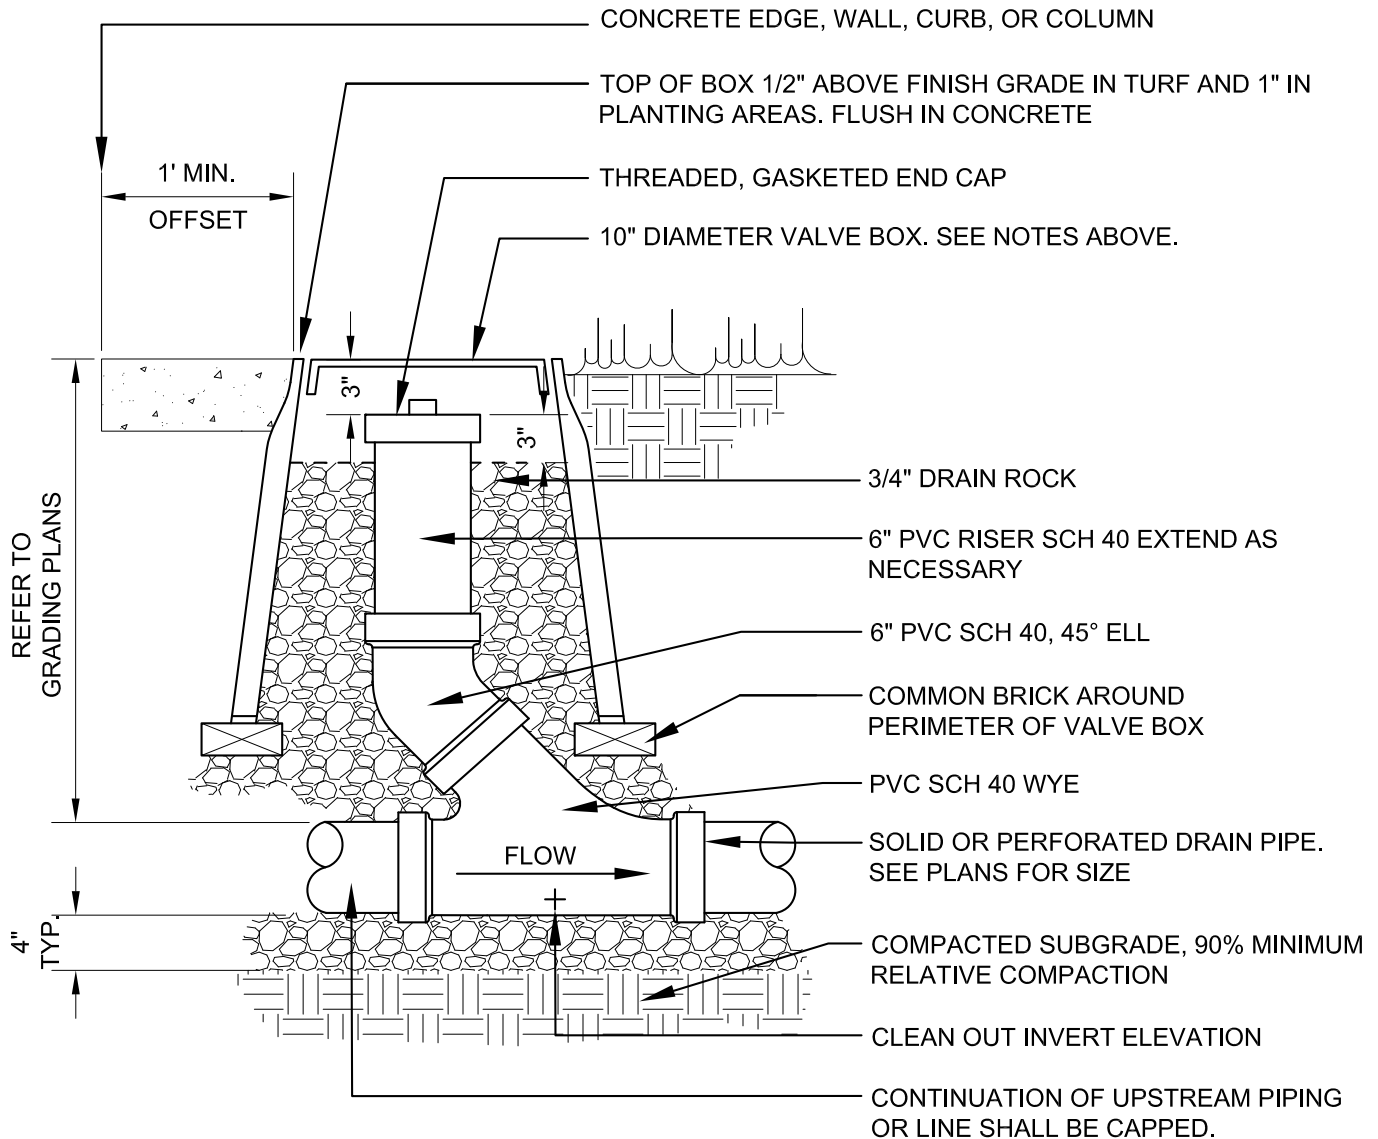

SCALE: 1" = 1'-0"

CITY OF FREMONT **PARK STANDARD DETAILS**

CLEAN OUT

DATE APPROVED BY CITY COUNCIL
December 13, 2011

RESOLUTION NO. 2011-65

SENIOR LANDSCAPE ARCHITECT

COMMUNITY SERVICES DIRECTOR

APR.	REVISED	DATE
REVISIONS		

FILE NO. PSD DR-8DWG	SCALE 1" = 1'-0"	DRAWN MAM	CHECKED RER	DATE 05/03/2011	DWG NO. PSD DR-8	1 OF 1
-------------------------	---------------------	--------------	----------------	--------------------	---------------------	--------